ipd4000NDCmalltipTES-10

Non-DII COE Installation Procedures (IP) for the Latitude-Longitude-Time (LLT) Observation API (MALLT) Segment of the Tactical Environmental Support System Next Century [TESS(NC)] Meteorology and Oceanography (METOC) Database

Document Version 4.0

15 December 1998

Prepared for:
Naval Research Laboratory
Marine Meteorology Division
Monterey, CA
And
Fleet Numerical Meteorology and Oceanography Center
(FNMOC)
Monterey, CA

Prepared by: Integrated Performance Decisions Middletown, RI

ipd4000NDCmalltipTES-10

Table of Contents

1	SCOPE	1
1.1	Identification	1
1.2	System Overview	1
•	Property can Do can revine	
2 2.1	REFERENCED DOCUMENTS	
2.1	Government Documents	4
3	SYSTEM ENVIRONMENT	6
3.1	System Requirements	6
3.1.1	Hardware Requirements	e
3.1.2	Operating System Requirements	e
3.2	System and Site Preparations	6
3.2.1	System Configuration	e
3.2.2	Operating System Preparation	7
3.2.3	Tape/Disk Preparation	
4	INSTALLATION INSTRUCTIONS	8
4.1	Installation	8
4.1.1	Media Booting Procedures for Sun Workstation Systems	8
4.1.2	Installation Procedure for Sun Workstation Systems	8
4.2	Installation of Upgrades	9
4.3	Installation Verification	9
4.4	Initializing the Software	9
4.5	List of Changes and Enhancements	9
4.6	Important Considerations	9
5	Notes	10
5.1	Glossary of Acronyms	10
	List of Figures	
1-1	TESS(NC) METOC Database Conceptual Organization	:
1-1	TEADUNCTIVIETON DAIADAS CONCEDIUAI OTEANIAUON	

1 SCOPE

1.1 Identification

These Installation Procedures (IP) describe a non-Defense Information Infrastructure (DII) Common Operating Environment (COE) installation of the Latitude-Longitude-Time (LLT) Observation Application Program Interface (API) (MALLT) segment, Version 4.2 series, of the Tactical Environmental Support System Next Century [TESS(NC)] Meteorology and Oceanography (METOC) Database. The MALLT segment provides APIs for the storage and retrieval of METOC point observations. This software is designed to run under the following configurations:

- A Sun computer running Solaris 2.6 without a DII COE system.
- DII COE release 3.1 on a Hewlett-Packard computer running HP-UX 10.20.

The instructions herein describe only the non-DII COE Solaris installation process.

1.2 System Overview

The software described in this document forms a portion of the METOC Database component of the TESS(NC) Program (Navy Integrated Tactical Environmental Subsystem (NITES) Version I). On 29 October 1996, the Oceanographer of the Navy issued a TESS Program Policy statement in letter 3140 Serial 961/6U570953, modifying the Program by calling for five seamless software versions that are DII COE compliant, preferably to level 5.

The five versions are:

•	NITES Version I	The local	data	fusion	center	and	principal	METOC	analysis	and
		forecast sy	stem	(TESS(NC))					

- NITES Version II The subsystem on the Joint Maritime Command Information System (JMCIS) or Global Command and Control System (GCCS) (NITES/Joint METOC Segment (JMS))
- NITES Version III The unclassified aviation forecast, briefing, and display subsystem tailored to Naval METOC shore activities (currently satisfied by the Meteorological Integrated Data Display System (MIDDS))

15 December 1998

ipd4000NDCmalltipTES-10

•	NITES Version IV	The Portable subsystem composed of independent PCs/workstations			
		and modules for forecaster, satellite, communications, and Integrated			
		Command, Control, Communications, Computer, and Intelligence			
		Surveillance Reconnaissance (IC4ISR) functions (currently the			
		Interim Mobile Oceanographic Support System (IMOSS))			

• NITES Version V Foreign Military Sales (currently satisfied by the Allied Environmental Support System (AESS))

NITES I acquires and assimilates various METOC data for use by US Navy and Marine Corps weather forecasters and tactical planners. NITES I provides these users with METOC data, products, and applications necessary to support the warfighter in tactical operations and decision making. NITES I provides METOC data and products to NITES I and II applications, as well as non-TESS(NC) systems requiring METOC data, in a heterogeneous, networked computing environment.

The TESS(NC) Concept of Operations and system architecture require that the METOC Database be distributed both in terms of application access to METOC data and products and in terms of physical location of the data repositories. The organizational structure of the database is influenced by these requirements, and the components of this distributed database are described below.

In accordance with DII COE database concepts, the METOC Database is composed of six DII COE-compliant *shared database* segments. Associated with each shared database segment is an API segment. The segments are arranged by data type as follows:

Data Type	Data Segment	API Segment
Grid Fields	MDGRID	MAGRID
LLT Observations	MDLLT	MALLT
Textual Observations and Bulletins	MDTXT	MATXT
Remotely Sensed Data	MDREM	MAREM
Imagery	MDIMG	MAIMG
Climatology Data	MDCLIM	MACLIM

ipd4000NDCmalltipTES-10

A typical client-server installation is depicted in Figure 1-1. This shows the shared database segments residing on a DII COE database server, with a NITES I or II client machine hosting the API segments. Communication between API segments and shared database segments is accomplished over the network using ANSI-standard Structured Query Language (SQL).

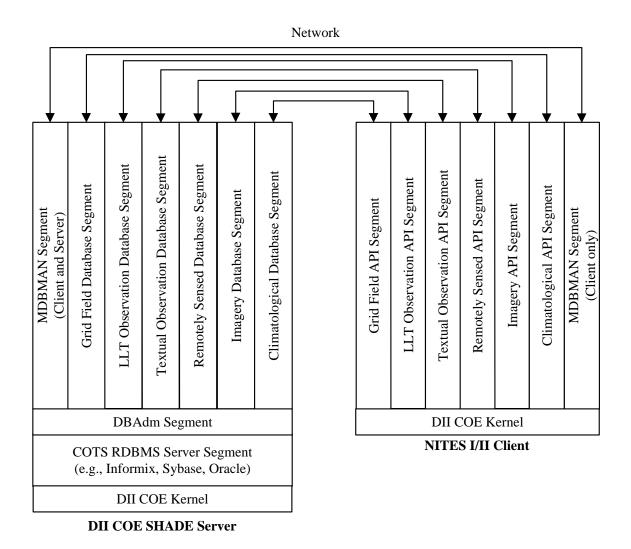


Figure 1-1. TESS(NC) METOC Database Conceptual Organization

The APIs in the MALLT segment deal with point observations. These include surface weather observations (hourlies, specials, synoptic observations, METAR reports, Terminal Aerodrome Forecasts (TAFs), etc.), upper air observations (e.g., radiosonde reports, aircraft observations), and ocean soundings (bathythermograph, sound velocity profiles, etc.). For upper air and ocean soundings, the database may also store data derived from the original soundings in the form of upper air profiles and ocean profiles.

2 REFERENCED DOCUMENTS

2.1 Government Documents

STANDARDS

MIL-STD-498 5 December 1994 Software Development and Documentation

SPECIFICATIONS

Unnumbered 30 September 1997

Software Requirements Specification for the Tactical Environmental Support System/Next Century [TESS(3)/NC] Meteorological and Oceanographic (METOC) Database, Space and Naval Warfare Systems Command, Environmental Systems Program Office (SPAWAR PMW-185), Washington, DC

Unnumbered 5 December 1997

Performance Specification (PS) for the Tactical Environmental Support System/Next Century TESS(3)/NC (AN/UMK-3)

OTHER DOCUMENTS

DII.COE.DocReqs-5 29 April 1997 Defense Information Infrastructure (DII) Common Operating Environment (COE) Developer Documentation Requirements, Version 1.0

Unnumbered 30 September 1997

Database Design Description for the Tactical Environmental Support System/Next Century [TESS(3)/NC)] Meteorological and Oceanographic (METOC) Database, Space and Naval Warfare Systems Command, Environmental Systems Program Office (SPAWAR PMW-185), Washington, DC

ipd4200malltrmTES-10 9 October 1998 Application Program Interface Reference Manual (APIRM) for the Latitude-Longitude-Time (LLT) Observation API (MALLT) Segment of the Tactical Environmental Support System Next Century [TESS(NC)] Meteorology and Oceanography (METOC) Database

ipd4000NDCmalltipTES-10

ipd4200malltpmTES-10 9 October 1998 Programming Manual (PM) for the Latitude-Longitude-Time (LLT) Observation API (MALLT) Segment of the Tactical Environmental Support System Next Century [TESS(NC)] Meteorology and Oceanography (METOC) Database

ipd4000NDCmalltipTES-10

3 SYSTEM ENVIRONMENT

3.1 System Requirements

3.1.1 Hardware Requirements

The MALLT software is hosted on a Sun Workstation.

The following configurations are recommended:

RAM: 128 MB minimum, 192 MB optimum

Disk Space: 2 GB Swap Space: 300 MB

3.1.2 Operating System Requirements

Solaris 2.6

3.2 System and Site Preparations

3.2.1 System Configuration

The following software must be properly installed prior to loading the MALLT software:

- Appropriate operating system (as described above)
- Informix Connect 7.24

MALLT uses the following environment variables related to the Informix installation:

• INFORMIXSERVER identifies the Informix server

Any application wishing to use the MALLT runtime libraries must add the MALLT/bin tree to the library search path as seen below.

• setenv LD_LIBRARY_PATH < MALLT_ROOT > MALLT/bin: \$LD_LIBRARY_PATH

NOTE: MALLT_ROOT is the path to where you extracted the tape's contents.

ipd4000NDCmalltipTES-10

3.2.2 Operating System Preparation

Information needed to prepare the operating system is found in Solaris-supplied documentation.

3.2.3 Tape/Disk Preparation

The MALLT software is delivered on a 4-mm DAT cartridge for the Sun Workstation hardware environment.

4 Installation Instructions

MALLT is a component of the TESS(NC) METOC Database API Computer Software Configuration Item (CSCI). The following procedures describe the installation of the MALLT software.

4.1 Installation

NOTE: Prior to segment installation, ensure that no existing MALLT software is already installed on the target platform. If so, run the /usr/local/METOCAPPS_INFO/uninstall.MALLT script to remove the existing version. The operator must be root to run the uninstall script.

4.1.1 Media Booting Procedures for Sun Workstation Systems

To prepare a tape for installation:

- 1. Insert the tape in the DAT drive.
- 2. Log in as root.
- 3. Extract the installation script from the tape using tar –xvf <tapedevicename>

4.1.2 Installation Procedure for Sun Workstation Systems

1. Invoke the extracted MALLT install script

./install.MALLT

- 2. Enter the NO-REWIND tape device name, or press the **ENTER** key to select the default value, displayed in the braces. The default value is /dev/rmt/0m.
- 3. After the tape device name is entered, a description of the segment to be installed is displayed. If this is the correct segment enter 'y' or press the ENTER key to accept the default value. If the description of the segment is not the segment to be installed, enter 'n', and the installation procedure is stopped. The default value is 'y'.
- 4. If 'y' was entered in the above step, you will need to specify the path where the segment is to be installed. Remember to end the path with the name of the segment in capital letters (e.g., /home/MALLT). The default value is /h/MALLT.

ipd4000NDCmalltipTES-10

- 5. If the directory specified above does not exist, the installation will create it for you if you choose. If you want the directory created, enter 'y' at the prompt, or select the default by pressing the **ENTER** key. If you don't want the installation script to create the directory, enter 'n' at the prompt. This will stop the installation process, and you will have to create the directory manually.
- 6. Once the directory has been created, you will be prompted to continue with the installation. If you wish to continue, either enter 'y' or select the default value by pressing the **ENTER** key. If you do not wish to continue the installation, enter 'n' at the prompt.
- 7. The script will proceed to install the segment to the directory that was specified. While the script is finishing up, it will create a new directory under /usr/local called METOCAPPS_INFO. This is where it will place two files, an uninstall script and an info file about the segment. This completes the installation of the MALLT segment.

4.2 Installation of Upgrades

Installation of upgrades will generally follow the same procedures listed above.

4.3 Installation Verification

Verification of proper installation may be done by running the testdrivers provided under the MALLT/Integ/Testsuite subdirectory. A Readme is provided explaining testdriver use.

4.4 Initializing the Software

This section is tailored out. No initialization of the software is required.

4.5 List of Changes and Enhancements

This section is tailored out. Discussion of MALLT features may be found in the MALLT API Reference Manual and Programming Manual, cited in Section 2.

4.6 Important Considerations

This section is tailored out.

ipd4000NDCmalltipTES-10

5 Notes

5.1 Glossary of Acronyms

AESS Allied Environmental Support System

API Application Program Interface

APIRM API Reference Manual

COE Common Operating Environment

CSCI Computer Software Configuration Item

DII Defense Information Infrastructure

FNMOC Fleet Numerical Meteorology and Oceanography Center

GCCS Global Command and Control System

IC4ISR Integrated Command, Control, Communications, Computer, and Intelligence

Surveillance Reconnaissance

IMOSS Interim Mobil Oceanographic Support System

IP Installation Procedures

JMCIS Joint Maritime Command Information System

JMS Joint METOC Segment

LLT Latitude-Longitude-Time

MALLT LLT Observation API Segment of the TESS/NC METOC Database

MDLLT LLT Observation Database Segment of the TESS/NC METOC Database

METOC Meteorology and Oceanography

MIDDS Meteorological Integrated Data Display System

NITES Navy Integrated Tactical Environmental Subsystem

PM Programming Manual

15 December 1998

ipd4000NDCmalltipTES-10

PS Performance Specification

SQL Structured Query Language

TAF Terminal Aerodrome Forecast

TESS(NC) Tactical Environmental Support System Next Century

15 December 1998